


## North American Industrial Power Conditioners

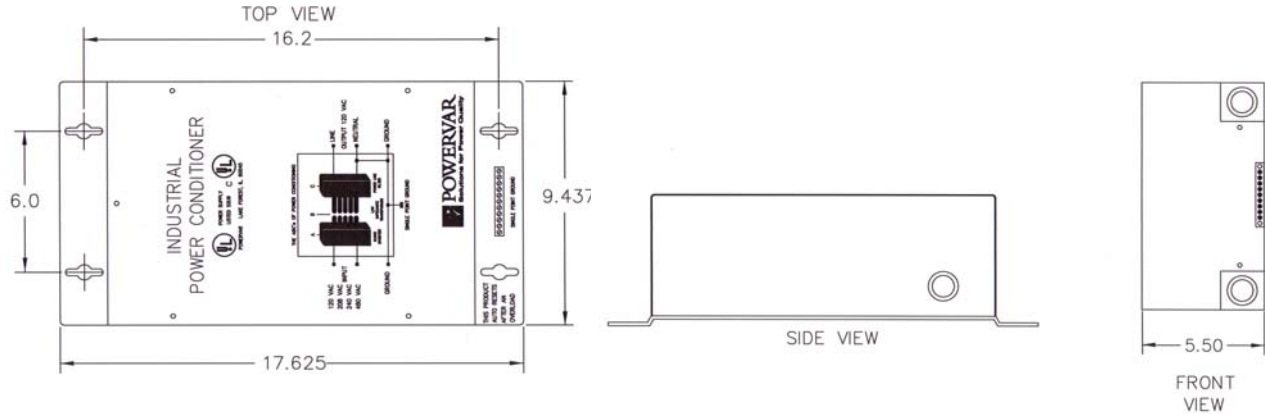

	<b>ABC360-91IND</b> <b>Part # 94030-XXR</b>	<b>ABC750-91IND</b> <b>Part # 94062-XXR</b>	<b>ABC1000-91IND</b> <b>Part #94083-XXR</b>	<b>ABC1500-91IND</b> <b>Part # 94125-XXR</b>
<b>VA Rating</b>	360	750	1000	1500
<b>Frequency</b>	60 Hz.	60 Hz.	60 Hz.	60 Hz.
<b>BTU/Hr. Output</b>	111	179	171	205
<b>T.H.D. % Added</b>	<1%	<1%	<1%	<1%
<b>Load Surge Current @</b>				
<b>1/2 cycle</b>	82 amps	215 amps	325 amps	400 amps
<b>1 second</b>	28 amps	102 amps	156 amps	192 amps
<b>10 seconds</b>	10 amps	30 amps	45 amps	55 amps
<b>Input Voltage</b>	Selectable - 120/208/240/480	Selectable - 120/208/240/480	Selectable - 120/208/240/480	Selectable - 120/208/240/480
<b>Output Voltage</b>	120	120	120	120
<b>Output Current</b>	3.0 amps	6.3 amps	8.3 amps	12.0 amps
<b>Efficiency</b>	91%	93%	95%	96%
<b>Voltage Drop No Load to Full Load</b>	7%	5%	4%	4%
<b>Wall mountable*</b>	Yes	Yes	Yes	Yes
<b>Compliance</b>	UL and cUL, RoHS	UL and cUL, RoHS	UL and cUL, RoHS	UL and cUL, RoHS
<b>Shipping Weight (lbs.)</b>	27	35	38	50

**NOISE REJECTION-ISOLATION:** With unit under power and an ANSI/IEEE C62.41Cat. A pulse applied either normal or common mode at the input, the noise output voltage will be less than 10V normal mode and less than 0.5V common mode in all four quadrants (CM-NM, NM-NM, CM-CM, NM-CM).

**SURGE VOLTAGE WITHSTAND CAPABILITY:** Tested under power to ANSI/IEEE C62.41 Cat. A & B (formerly IEEE587-1980). Cat. A - 6000V @ 200 amps, 0.5 usec risetime, 100 kHz decay, Cat. B - 6000V @ 500 amps, 0.5 usec risetime, 100 kHz decay.

## North American Industrial Power Conditioners Available Enclosure Configuration Option

**POWERVAR Part #**

**ABC360-91IND - 94030-XXR\***

**ABC750-91IND - 94062-XXR\***


**ABC1000-91IND - 94083-XXR\***

**ABC1500-91IND - 94125-XXR\***

\*When ordering, add two digit number from below in place of **XX** to specify enclosure configuration below


**Option 1**

-01- Hardwire with splashproof NEMA enclosure

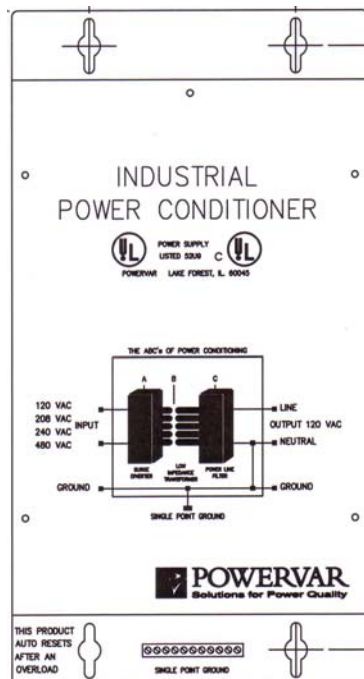

**Option 2**

-02 - Hardwire - Open Frame

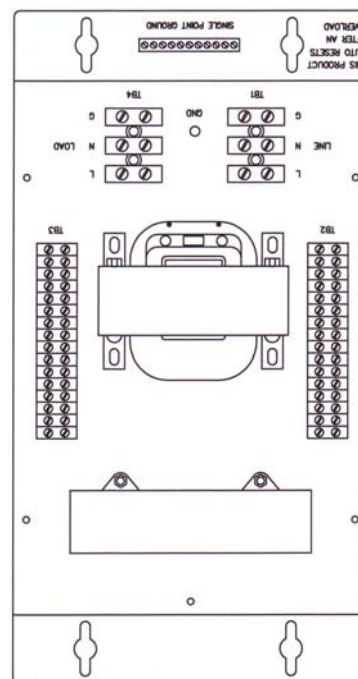

**Warranty/Support:** POWERVAR warrants its power conditioners to be free from defects in materials and workmanship for a period of five years from the date of shipment. For North American service or support on any POWERVAR product, please contact POWERVAR Technical Support at (800) 369-7179 (in Illinois call (847-596-7000)). For service and support in EMEA, contact POWERVAR, Ltd. in the United Kingdom at +44 (0) 1793 553980. Or visit the POWERVAR website at [www.powervar.com](http://www.powervar.com).