




Security II RACKMOUNT UPM PDU Specifications

North American Models PDU1004-11 and PDU1004-11MED

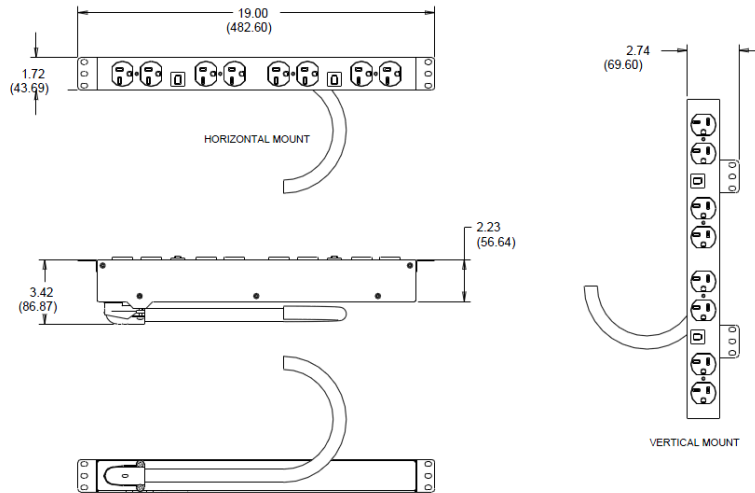

	POWERVAR PDU1004-11 53104-01R	POWERVAR PDU1004-11MED 53104-21R
Type	Standard PDU	Medical Grade PDU
Frequency	50 / 60 Hz.	50 / 60 Hz.
Input Voltage	120	120
Input Current	24 Amps	24 Amps
Output Voltage	120	120
Output Current	24 Amps	24 Amps
Shipping Weight (Lbs.)	10	10
Rear Panel Information and Controls <ul style="list-style-type: none"> 6 Foot Power Cord with L5-30 Plug Eight (8) 5-20 Receptacles (2) Circuit Breaker Environmental <ul style="list-style-type: none"> Temperature: 0 - +40° C (32 to 104°F) Operating -20 to 60° C (-40 to 140° F) Shipment/Storage Humidity: 5 to 90% Non-Condensing (Operating, Shipment/Storage) Altitude: 3,000m (10,000 ft) max. Operating; 12,000m (40,000 ft) max. Shipment/ 		Safety Agency and EMC Compliance: All Units are Listed by UL 60950-1, 2nd Edition, 2014-10-4 Marked with the UL/cUL Marking. *RoHS Compliance: All Products (Standard and Medical) are RoHS Compliant

Warranty/Support: For service or support on any VitalSine product, please contact VitalSine Technical Support at (877) 500-6937 or visit the VitalSine website at www.vitalsine.ca.